

Architecting System Performance; Measuring

by *Gerrit Muller* TNO-ESI, University College of South East Norway

e-mail: gaudisite@gmail.com

www.gaudisite.nl


Abstract

Measuring is an essential part of architecting performance. Measurements provide quantified insight in actual behavior and performance. In this presentation, we discuss measuring, benchmarking, and instrumentation.


Distribution

This article or presentation is written as part of the Gaudí project. The Gaudí project philosophy is to improve by obtaining frequent feedback. Frequent feedback is pursued by an open creation process. This document is published as intermediate or nearly mature version to get feedback. Further distribution is allowed as long as the document remains complete and unchanged.

October 3, 2016
status: preliminary
draft
version: 0

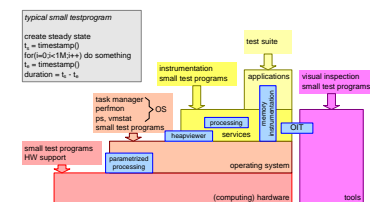


Performance Attributes in the Benchmark Stack

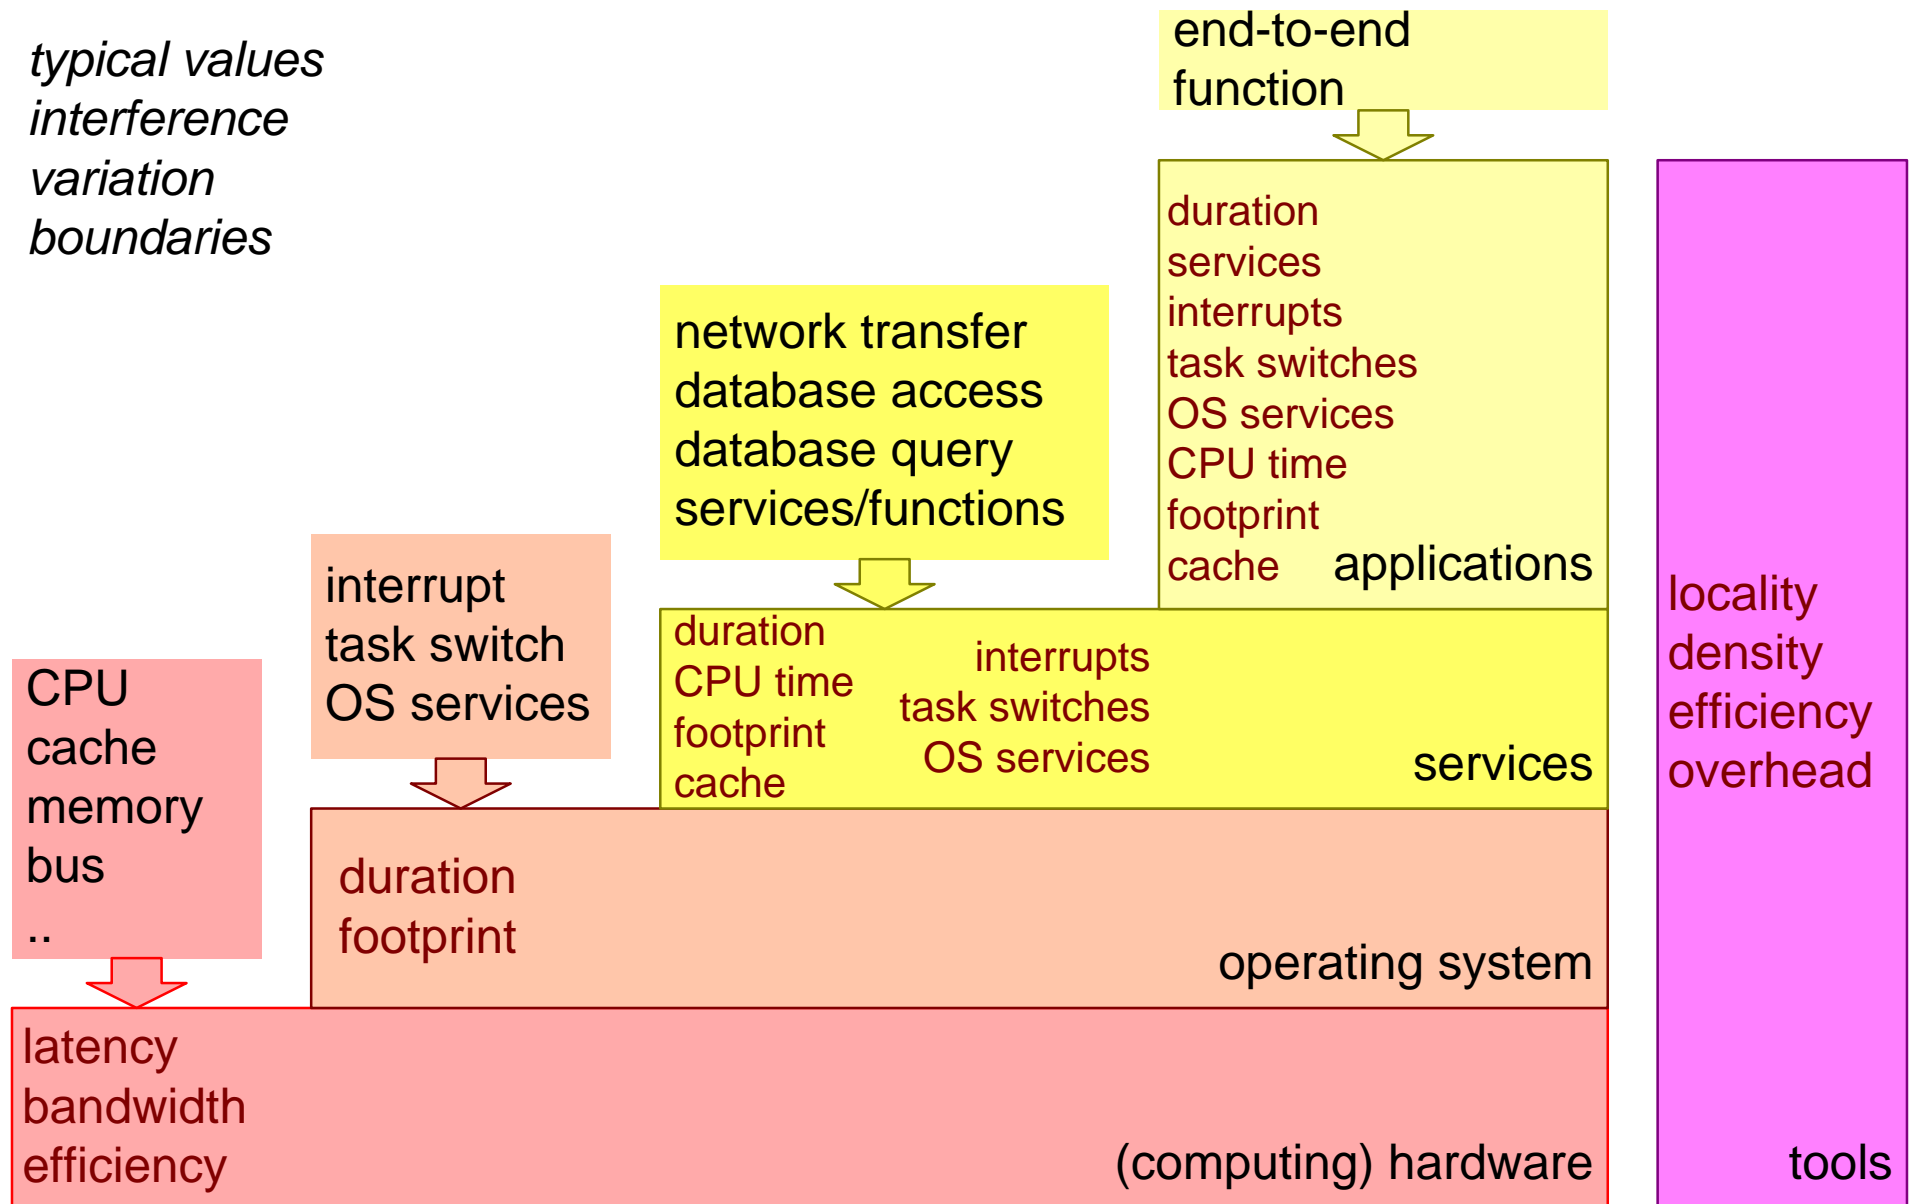

Performance as Function of the Layers

system performance = f(

↑
how much
does it cost?

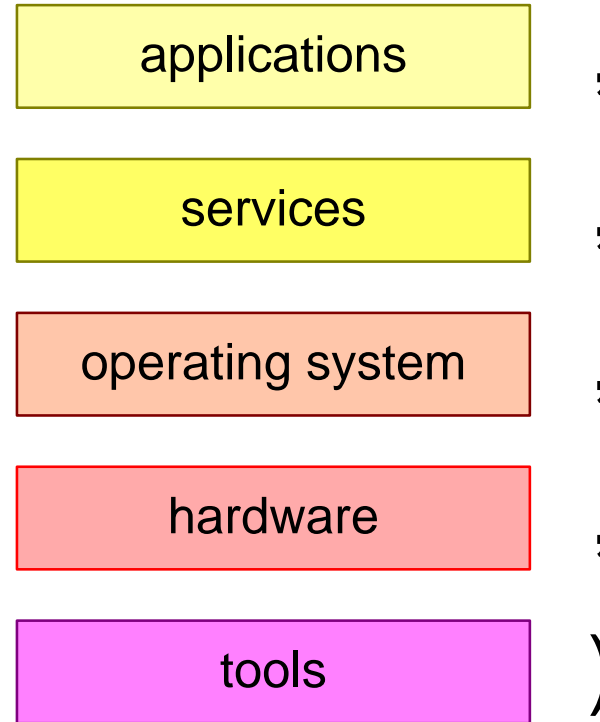


↓
what is used?
how often?


Example μ Benchmarks for Software

	<i>infrequent operations, often time-intensive</i>	<i>often repeated operations</i>
<i>database</i>	start session finish session	perform transaction query
<i>network, I/O</i>	open connection close connection	transfer data
<i>high level construction</i>	component creation component destruction	method invocation same scope other context
<i>low level construction</i>	object creation object destruction	method invocation
<i>basic programming</i>	memory allocation memory free	function call loop overhead basic operations (add, mul, load, store)
<i>OS</i>	task, thread creation	task switch interrupt response
<i>HW</i>	power up, power down boot	cache flush low level data transfer

Measurement Errors and Accuracy

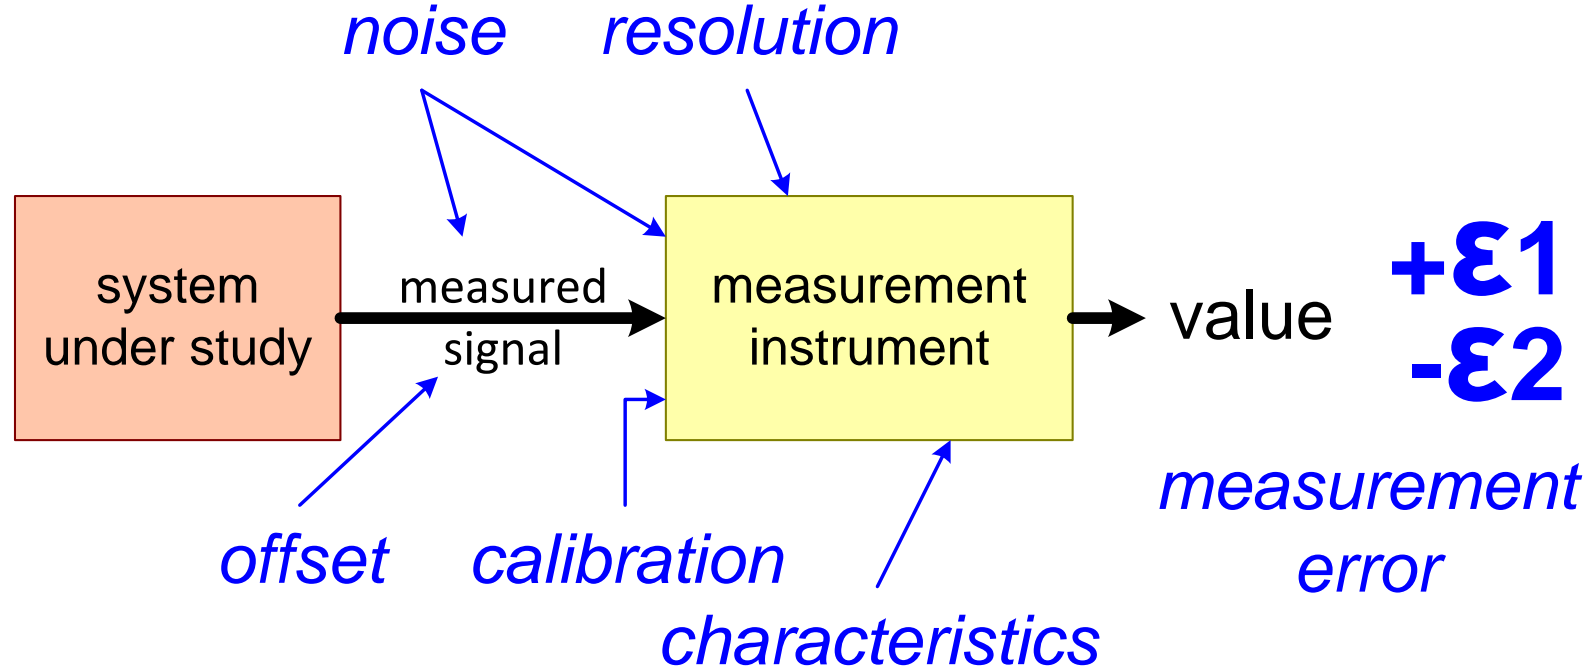

measurements have stochastic variations and systematic deviations resulting in a range rather than a single value

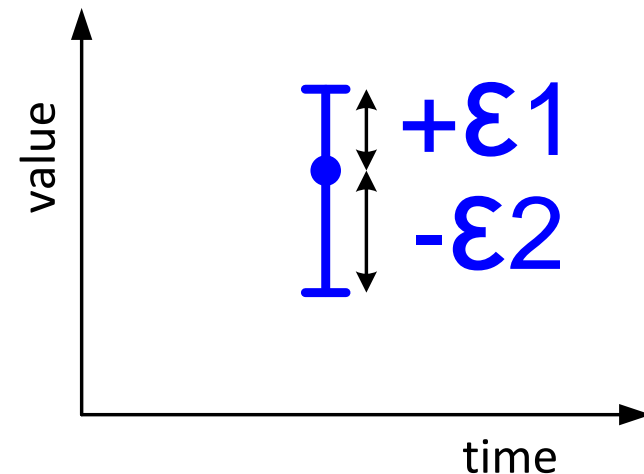

Be Aware of Error Propagation

$$t_{\text{duration}} = t_{\text{end}} - t_{\text{start}}$$

$$t_{\text{start}} = 10 \pm 2 \mu\text{s}$$

$$t_{\text{end}} = 14 \pm 2 \mu\text{s}$$

$$t_{\text{duration}} = 4 \pm ? \mu\text{s}$$

systematic errors: add linear

stochastic errors: add quadratic

Measurements have

stochastic variations and systematic deviations

resulting in a range rather than a single value.

The inputs of modeling,

"facts", assumptions, and measurement results,

also have stochastic variations and systematic deviations.

Stochastic variations and systematic deviations

propagate (add, amplify or cancel) through the model

resulting in an output range.

Tools and Instruments in the Benchmark Stack

